
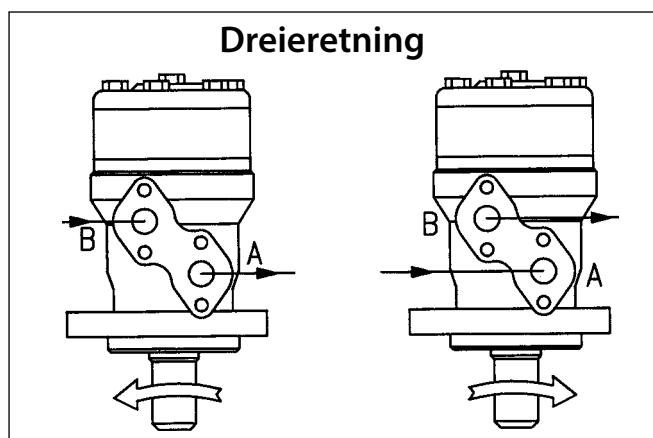
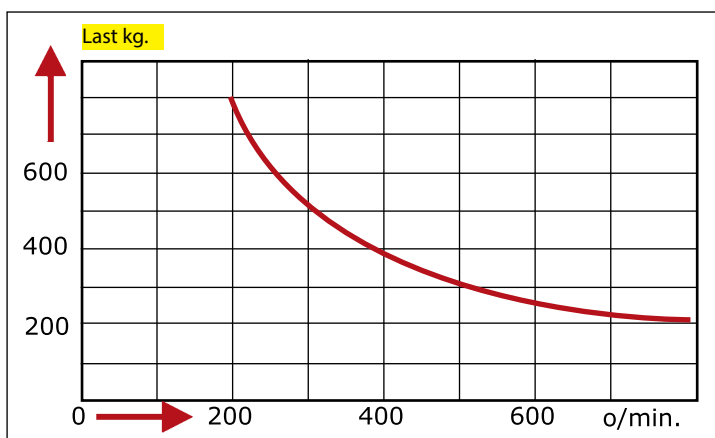
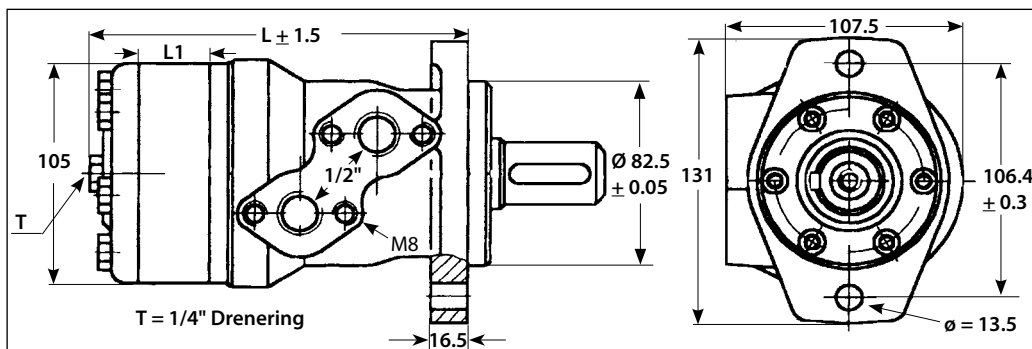




O/MIN	BAR	
0-100	150	kontinuerlig
100-300	75	kontinuerlig
300-600	50	kontinuerlig
0-maks	20	intermittent

Intermitterende drift - 10% av hvert min.
Spissbelastning - 1% av hvert min.

HF 209991.....Pakningssett EPRM...A 1990-1997
HF 209992.....Akseltetning EPRM...A 48 mm utv.

MOTOR	STØRRELSE	TRYKK			OMDREINING PR. MIN.			MOMENT			MÅL		LØFTEKRAFT KG.
BEST.NR.	CM ³	MAKS TRYKK bar			MAKS omdr./min		MINIMUM	Kg (daNm) på 1 m arm			L	L1	HJUL Ø=100 MM
EPRM...D	cm ³ /omdr.	Kontinu- erlig	Int	spiss	Kont	Int	omdr.mib.	Kont	Int	spiss	mm	mm	(tilsvarer 50 mm arm)
HE 24505	51.5	140	175	225	775	970	10	10 kg	13 kg	17 kg	139.5	9.0	200 kg.
HE 24510	80.3	175	200	225	750	940	10	20 kg	22 kg	27 kg	145.0	14.0	380 kg.
HE 24515	99.8	175	200	225	600	750	10	24 kg	28 kg	32 kg	148.5	17.4	480 kg.
HE 24520	125.7	175	200	225	475	600	10	30 kg	34 kg	37 kg	150.4	21.8	600 kg.
HE 24525	159.6	175	200	225	370	474	10	39 kg	43 kg	46 kg	159.0	27.8	*
HE 24530	199.8	140	175	225	300	375	10	39 kg	46 kg	56 kg	166.0	34.8	*
HE 24535	250.1	110	150	200	240	300	10	39 kg	47 kg	60 kg	172.0	43.5	*
HE 24540	315.7	85	115	150	190	240	10	36 kg	47 kg	61 kg	186.0	54.8	*
HE 24545	397.0	65	90	115	150	190	10	38 kg	69 kg	61 kg	198.0	69.4	*